


Airtok

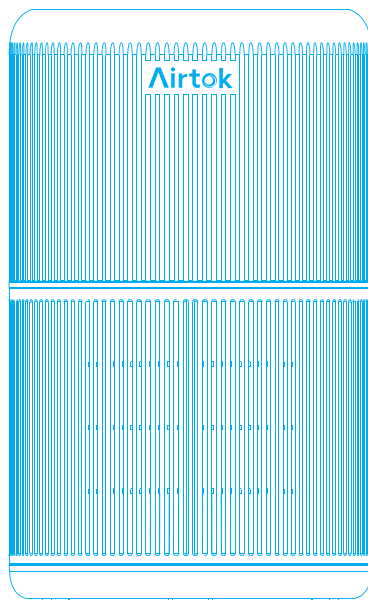

【 AP0601 】

AIR PURIFIER

READ AND SAVE THESE INSTRUCTIONS

Congratulations on your purchase of this Airtok air purifier. Please study this manual carefully to familiarize yourself with the features and functions of your Airtok air purifier. Inside you will find many helpful hints on how to use and maintain your Airtok air purifier properly.

If you encounter any issues or have any questions regarding your new product, feel free to contact our helpful Customer Support Team. Your satisfaction is our goal!

LIVE CHAT SUPPORT

Scan QR Code & Start Chatting



www.airtok.com




Read all instructions before using this air purifier.

When using an electrical appliance, basic precautions should always be followed, including the following:

- Make sure the air purifier is plugged into a live 120V AC outlet.
- Always turn off and unplug the air purifier when not in use.
- Disconnect the power supply from your air purifier by unplugging the power cable before replacing filters and before cleaning and before servicing.
- Do not use attachments or filters not recommended by Airtok.
- Do not use the air purifier outdoors.
- Do not attempt to remove any part of the unit except the filters.
- Do not attempt to repair the air purifier.
- Do not attempt to plug in the machine when your hands are wet.
- Do not soak the purifier in water or splash water on it.
- Do not operate the air purifier near an open flame.
- Do not obstruct the air inlet and air outlet of the air purifier.
- Save these instructions for future reference.
- To reduce the risk of fire or electric shock, do not use this fan with any solid-state speed control device.

Unpack your Airtok purifier follows


1. Remove the Airtok purifier from the packaging.
2. Check the components received against your packing slip to make sure you have all the parts.
3. Check the unit and all the components for damage. If the unit or any of the components show damage from shipping, contact Airtok Technology Inc. (www.airtok.com).

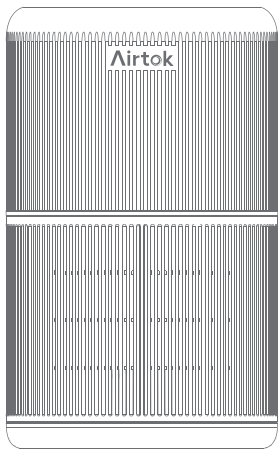


Host
(1PCS)



Aroma Pads
(12 PACK)




Filter
(1PCS)
(loaded into the host)




Adapter
(1PCS)
(Put into the filter)



Manual
(1PCS)

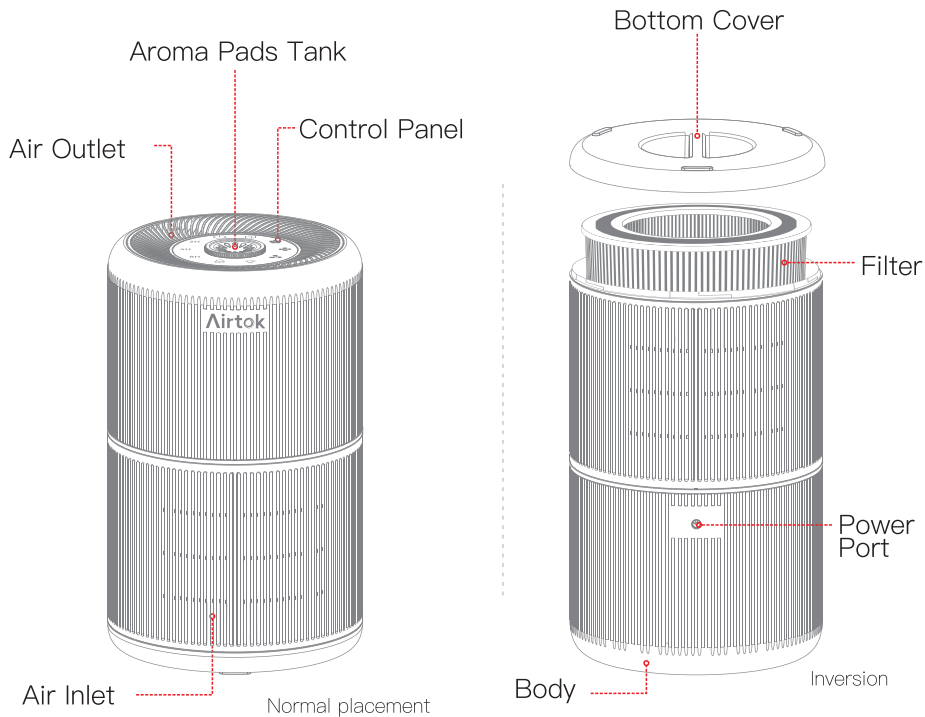

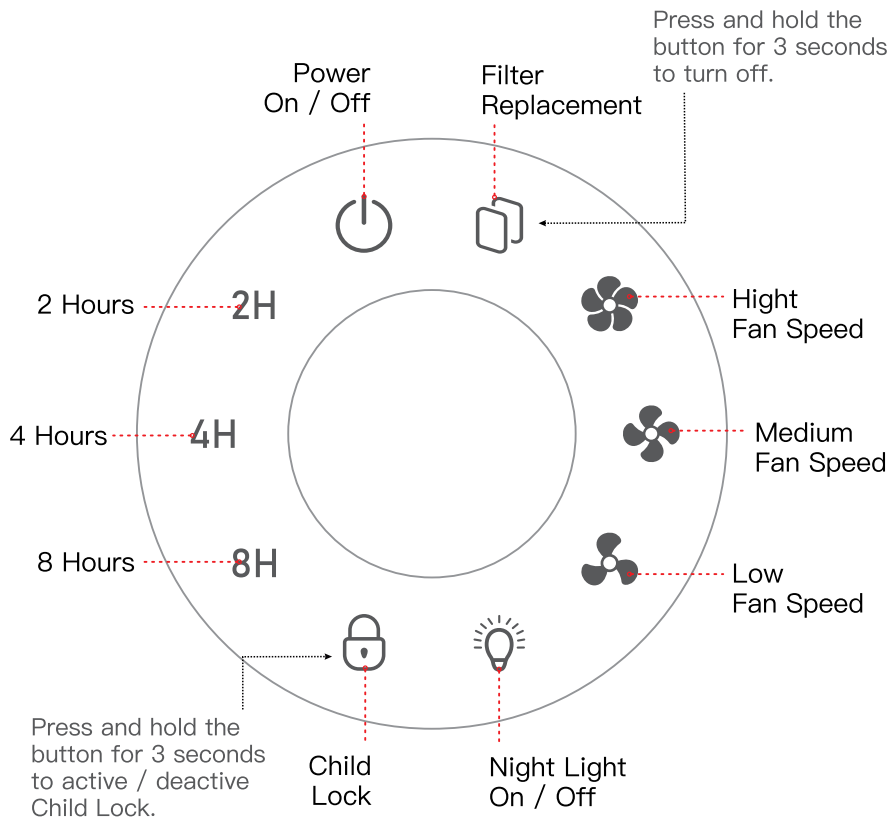

When to replace filter

The filter life depends on the actual working environment. In the normal service environment, the filter life is 1,500 hours. After about 1,350 hours (90% of rated lifecycle) of cumulative operation, the Filter Replacement light will flash to remind you to purchase and replace the used filter. Replace it with a new one, then press and hold the Filter Replacement button for 3 seconds. And the Filter Replacement light goes out as the buzzer makes a beep.



Filter Replacement

What to do if the air is dirty

Turn on the machine and press the fan speed button to adjust the fan speed.



Low Speed



Medium Speed



High Speed

Night light

Press the night light button once and the night light goes out. You can also turn off the night light when it's time for bed.



Night Light

How to use child lock

In the power-on state, long press the child lock for 3 seconds, the child lock indicator light is on, and the child lock function is enabled; Press and hold the child lock for 3 seconds, the indicator light of the child lock goes out, and the child lock function is cancelled.



Timer switch


Timing power-off method: in the power-on state, press the “2H”, “4H” or “8H” button, you can set power-off time of 2, 4 or 8 hours from the set time.




Where is the power adapter

09


The adapter is inside the machine. Please take it out according to the following steps.




Placing the machine bottom up, rotate the bottom cover clockwise to unlock it




Separate the bottom cover from the machine




Take the power adapter package out of the machine



Take the power adapter out of the package



Close the bottom cover to the machine and turn the base cover counterclockwise to lock it




Place the machine bottom down and plug into the power adapter


How to replace filter

10


After about 1,350 hours (90% of rated lifecycle of filter) of cumulative operation, the Filter Replacement indicator will light up to remind you to purchase a new filter and replace the used filter.




Placing the machine bottom up, rotate the bottom cover clockwise to unlock it




Separate the bottom cover from the machine, Remove the old filter




Remove the packaging bag of the new filter



Install the new filter




Close the bottom cover to the machine and turn the base cover counterclockwise to lock it




After switching on the power, press and hold the filter replacement button for 3 seconds, and when you hear the beep, the installation is successful.

■ How to add essential oil 11 ■

When the aroma pads does not have fragrance, you need to drop the essential oil into the aroma pads.




Rotate the aroma pad tank cover counter-clockwise



Separate the aroma pad tank cover from the machine




Drop essential oil into the new aroma pad




Install the aroma pad tank cover onto the machine and tighten the aroma pad tank cover clockwise

How to handle aroma pads 12


New aroma pads does not have fragrance, you need to drop the essential oil into the aroma pads.




1 Rotate the aroma pad tank cover counterclockwise to separate the cover from the machine




2 Remove old aroma pad from the machine




3 Take the new aroma pads out from the aroma pad package



4 Put the new aroma pads into the machine



5 Drop essential oil into the new aroma pad



6 Install the aroma pad tank cover onto the machine and tighten the aroma pad tank cover clockwise

Input Voltage (Adapter)	AC100–240V / 50–60Hz
Rated Voltage	DC12V / 1.0A
Rated Power	10 W
CADR	60 CFM / 100 m ³ /h
Operating Conditions	Temperature: 14°F–104°F / –10°C–40°C Humidity: ≤ 85% RH
Noise Level	25–55 dB
Product Net Weight	2.9 lb / 1.3kg
Product Size	6.3x6.3x10.2 inch / 160x160x260 mm

Warranty

- Your product is guaranteed by us for 12 months from your original date of purchase. If you want to extend your warranty for one more year, please do not hesitate to contact us.
- Become a AIRTOK member to get the information about the replacement filter and the latest products. (AIRTOK reserved the right of final explanation).

Share your stars

Leave a product review and help others out by sharing your experience.

Problem	Check items	Solution
The air purifier does not turn on	Whether the socket has power	Power on
	Whether the plug is loose from the socket	Connect the power
When the purification function is turned on, the sound is dull and the wind is small	Whether the air outlet is covered	Turn off the purifier and remove the covering
There is a peculiar smell at the air outlet	Whether there is a large amount of peculiar smell near the air inlet that continues to release	After removing the odor and using the purifier to run for a period of time, the odor will gradually disappear
	Whether the filter has reached the replacement time	Replace the filter

- ❖ The product may have a slight peculiar smell during the initial period of use, which is a normal phenomenon.

Airtok



www.airtok.com



support@airtok.com



Airtok Lifestyle